

TOSHIBA

mt200

Contrast 2,500 : 1
True 16 : 9 Wide Screen
Truevision De-Interlacing™*



Happy End

for your HomeCinema



mt200

technical data



Display	0,55" DLP Chip™*
Resolution	Real Wide Panel 854 x 480
Brightness	750 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,500 : 1
Projection format	16:9 switchable to 4:3
Lamp	200 W / 160 W in ECO mode (TLPLMT20LAMP)
Max. lamp life	up to max. 2,000 hours / up to max. 3,000 hours in ECO mode
Lens	F = 2.75 - 3.08 / f = 22.3 - 26.76 mm, manual zoom and focus
Zoom ratio	1.2 x
Throw ratio	1.87 - 2.25 : 1
Frequencies (hor. / vert.)	15 - 93 kHz / 50 - 85 Hz
Picture mode	Dynamic, Standard and Cinema mode
Projection	front, rear and ceiling
Digital keystone correction	vertical + / - 15°
Picture size (diagonal)	0.61 - 7.36 m
Projection distance	1.2 - 12.0 m
Input signal	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 1,080i, 720p, VGA, SVGA / XGA / SXGA (comp.)
Inputs	RCA composite, S-video, RCA component, DVI, RGB (D-sub 15 pin)
Outputs	-
Serial interface	RS-232C (mini DIN8 pin)
Power supply	AC 100 - 240V, 50 / 60 Hz
Embedded speaker	-
Dimensions (W x H x D)	298 x 275,4 x 101,4 mm
Weight	2,8 kg
Specials	ECO mode, Auto Image set-up
Accessories	remote control with batteries, owners manual, S-Video-, RCA- and power-cable, lens cap
Options	ceiling-mounting, trolley, spare lamp


*DLP and Truevision De-Interlacer are registered trademarks of Texas Instruments

Benefits

- Very high contrast ratio: 2,500 : 1
- Truevision De-Interlacer™* optimizes the representation of video signals
- Digital DVI-D-link enables the connection with the HDMI-output of DVD players.
- True 16 : 9 Wide Screen-format
- 3 pictures modes: Dynamic, Standard and Cinema
- Practically: all links on the rear side



Projection distance (in meters)

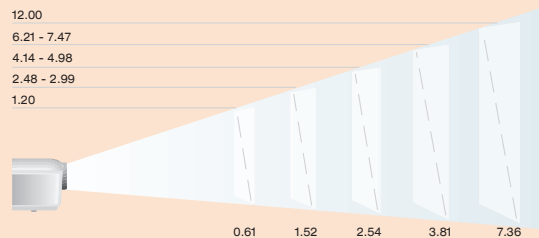

Picture size (diagonal in meters)

September 2004 • Subject to modifications and errors