

TOSHIBA

S80

Contrast 2,000 : 1
2,000 ANSI-lumens
SVGA-resolution



Designed
for perfect
HomeCinema pleasure.



S80

technical data




Display	0.55" DDR DMD Chip™*
Resolution	SVGA 800 x 600
Brightness	2,000 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9
Lamp	160 W (TLPLW3LAMP)
Max. lamp life	up to max. 3,000 hours
Frequencies (hor./vert.)	15 - 93 kHz / 50 - 85 Hz
Lens	F= 2.4 - 2.65, f= 28.04 - 35.59 mm manual zoom, focus
Projection	front, rear and ceiling
Zoom ratio	1.2 x
Throw ratio	2.0 - 2.4:1
Digital keystone correction	vertical +/- 15°
Picture size (diagonal)	0.63 m - 6.25 m
Projection distance	1.2 m - 10 m
Input signal	NTSC/PAL/SECAM, 480i, 480p, 576i, 576p, 1080i, 720p, VGA/SVGA/XGA, SXGA/UXGA (comp.)
Inputs	2 x RGB (D-sub 15), 2 x video (RCA, S-video), component video (D-sub 15), audio (2 x RCA, stereo mini jack)
Outputs	RGB (D-sub 15 x 1), audio (stereo mini jack)
Serial interface	RS-232C (mini DIN8 pin), USB
Power supply	AC 100-240V, 50/60 Hz
Loudspeaker	integrated
Dimensions (W x H x D)	298 x 101 x 275 mm
Weight	2.8 kg
Specials	ECO mode
Accessories	remote control with batteries, owners manual (CD ROM), quick reference, RGB- and power-cable, softcase, lens cap
Options	ceiling-mounting, trolley, spare lamp

*DLP is a registered trademark of Texas Instruments

Benefits

- High contrast ratio: 2,000:1
- Very bright with 2,000 ANSI-lumens even under difficult lighting conditions
- Extremely compact
- Rich terminal
- Excellent design with all terminals at rearside
- 3 Image Mode (Priority for Standard/True Color/High Brightness)

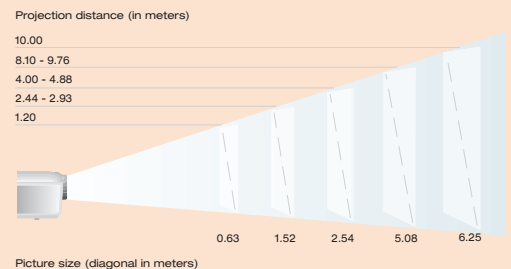

August 2004 • Subject to modifications and errors