

# TOSHIBA

For conferences  
with sparkle.

**t100 tw100** 2,600 ANSI-lumens  
Contrast 2,000:1  
XGA Resolution  
tw100: Wireless



- Many functions like password, panel lock and userlogo
- 2 RGB-Inputs
- 1 RGB- and 1 Audio-Output
- tw100: USB reader, wireless LAN, power zoom, auto focus




\* NCE2 is an improved color optimization by Toshiba

DLP™, the DLP™-Badge are registered trademarks of Texas Instruments.

## t100 tw100



- Display** 0.55" DMD Chip™\*
- Resolution** XGA 1,024 x 768
- Brightness** 2,600 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 2,000:1
- Projection format** 4:3 switchable to 16:9
- Lamp** 275 W (TLPLW10LAMP)
- Max. lamp life** up to max. 2,000 hours/  
up to max. 3,000 hours in ECO mode
- Lens** F = 2.07 - 2.64 / f = 20.5 - 32.8 mm wide angle  
t100: manual zoom and focus  
tw100: power zoom, auto focus
- Zoom ratio** 1.6 x (large zoom zone)
- Throw ratio** 1.8 - 2.8 : 1
- Frequencies (hor./vert.)** 15 - 120 kHz / 50 - 150 Hz
- Projection** front, rear and ceiling
- Digital keystone correction** vertical +/- 30°
- Picture size (diagonal)** 0.76 m - 7.62 m
- Projection distance** 1.07 m - 11.09 m
- Input signal** NTSC / PAL / SECAM 480i, 480p, 576i, 576p, 720p, 1,080i, VGA / SVGA / XGA, SXGA + UXGA (compr.)
- Inputs** 2 x RGB (D-sub 15), S-video, composite video (RCA), 3 x audio (2 x RCA, 1 x stereo mini jack),  
tw100: USB Typ A
- Outputs** monitor (D-sub 15), audio (stereo mini jack)
- Serial Interface** RS-232C (mini DIN 8pin)
- Power supply** AC 100 - 240V, 50/60 Hz
- Loudspeaker** 1 W (mono)
- Dimensions (W x H x D)** 300 x 99 x 218 mm
- Weight** t100: 2,9 kg, tw100: 3,0 kg
- Features** user logo, password protection, key lock, NCE 2, resize- and black board-function, when "Power OFF" immediately off, ECO mode, auto V keystone correction, DDC compatible (blue terminal)  
tw100: auto focus, power zoom, USB reader (type A), wireless LAN
- Accessories** remote control with laserpointer and batteries, owners manual (CD ROM), audio-, S-video-, RGB- and power cable, softcase,  
tw100: WLAN card and software
- Options** trolley, spare lamp, camera c001, ceiling mount
- Wireless communication (tw100)** WLAN capable with WLAN card, wireless LAN (IEEE802.11b/g), 64/128 bit encoding, wep+

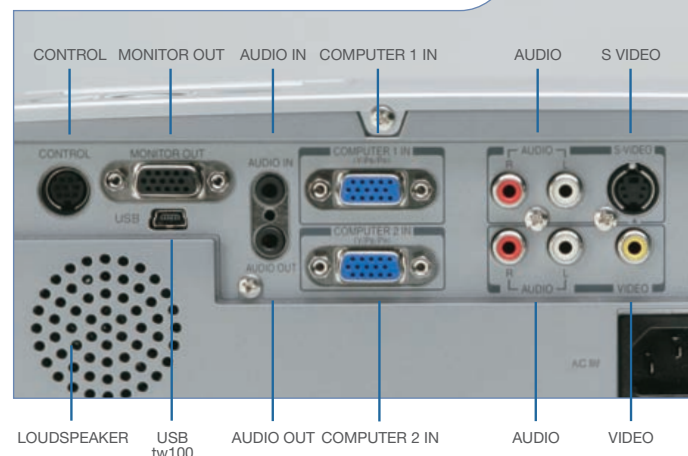

projection size (m)	projection distance a (m)	
	min lenght (zooming max)	max lenght (zooming min)
0.76	1.07	1.75
1.02	1.45	2.35
1.52	2.19	3.55
2.03	2.93	4.74
2.54	3.67	5.93
3.81	5.53	8.92
5.08	7.38	-
6.35	9.24	-
7.62	11.09	-

Toshiba Europe GmbH  
Projection & Display Technology  
Phone: ++49-2131-158-01 · Fax: ++49-2131-158-835  
e-mail: projektoreninfo@toshiba-teg.com