



Fast Wireless Transmission Projector

Easy wireless projection (PT-LB60NTEA/LB55NTEA)

- Fast data transfer
- Wireless^{*1} PC motion/sound streaming^{**}
- Abundant wireless functions, including secondary display transmission and 16-window index style
- Simple, user-friendly settings



Daylight View 2 technology

- Looks max. 50% brighter^{**}
- Vivid colours in a bright room
- Auto operation with ambient light sensor (ALS)

High power and portability

- Bright 3,200/2,500 lumens^{**}
- Ultra-lightweight: 2.5 kg/2.6 kg (5.5 lbs/5.7 lbs)^{**}
- Slim and compact design: 75-mm thickness^{**}

Quick operation

- 2-second speed start
- Auto search
- Real-time keystone correction
- Operation assistance
- Direct power off




Wireless Prompter (Secondary Display) Function

This allows transmission of content other than what's displayed on your PC. For example, you can display text documents on your PC screen while projecting slide from your Microsoft® PowerPoint® presentation^{**}. You get a host of other convenient wireless transmission functions too, such as area-specified transmission and a multi-live mode for simultaneous display of up to 16 PCs.



Daylight View 2

A built-in sensor measures the ambient light, and the halftone colours and brightness level are adjusted accordingly in real time. Viewing brightness is increased up to 150%^{**}.

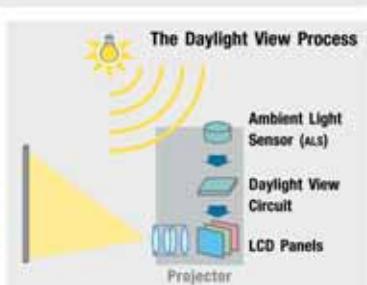

^{*1} Wireless projection function is featured on the PT-LB60NTEA and LB55NTEA only.

^{*2} Content and DVDs set with DRM (Digital Rights Management) cannot be transmitted.

^{**3} Comparison with Daylight View 2 turned On and Off, using an 80-inch screen and ordinary meeting room lighting of 400 lux. (Projector: PT-LB60NTEA, screen gain: 2.6)

^{**4} 3,200 lumens for the PT-LB60NTEA and PT-LB60EA; 2,500 lumens for the PT-LB55NTEA and PT-LB55EA.

^{**5} 2.5 kg/5.5 lbs for the PT-LB60EA and PT-LB55EA; 2.6 kg/5.7 lbs for the PT-LB60NTEA and PT-LB55NTEA.

^{**6} Legs and protrusions not included.

^{**7} PT-LB20NTEA

^{**8} Transmission will be slower than transmission with a computer that has the software installed. Also, certain functions may not be available.

^{**9} With Wireless Manager ME 3.0, you can use the projector screen as a secondary monitor for the PC. In this setup, Microsoft® PowerPoint® must be set to "Show Presenter View."



Specifications

Power supply	100–240 V AC, 50/60 Hz
Power consumption	300 W (Approx. 2 W in standby mode with fan stopped)
LCD panel	4:3 aspect ratio, micro lens array
Panel size	PT-LB60NTEA/LB60EA 0.8" (20.32 mm) diagonal
	PT-LB55NTEA/LB55EA 0.7" (17.78 mm) diagonal
Display method	Transparent LCD panel (x 3, R/G/B)
Drive method	Active matrix
Pixels	786,432 (1,024 x 768) x 3, total of 2,359,296 pixels
Pixel configuration	Stripe
Lens	Manual zoom (1:1–1:1.2), manual focus, F 1.7–1.8, f 24.0–28.8 mm
Lamp	220 W UHMTM lamp
Colours	Full colour (16,777,216 colours)
Brightness	PT-LB60NTEA/LB60EA 3,200 lumens
	PT-LB55NTEA/LB55EA 2,500 lumens
Uniformity	90%
Contrast	400:1* (full on/full off)
Scanning frequency	
RGB	Horizontal: 15–91 kHz, Vertical: 50–85 Hz
YPbPr	480i (525i): fr 15.75 kHz; fv 60 Hz 576i (625i): fr 15.63 kHz; fv 50 Hz 480p (525p): fr 31.5 kHz; fv 60 Hz 576p (625p): fr 31.25 kHz; fv 50 Hz 720p (750p): fr 45 kHz; fv 60 Hz 1080i (1125i): fr 33.75 kHz; fv 60 Hz 1080i (1125i): fr 28.125 kHz; fv 50 Hz
S-Video/Video	NTSC, NTSC4.43, PAL-M, PAL60: fr 15.75 kHz; fv 60 Hz PAL, SECAM, PAL-N: fr 15.63 kHz; fv 50 Hz
Projection size	33–300 inches/838–7,620 mm diagonally
Throw distance	
PT-LB60NTEA/LB60EA	1.1 m–10.8 m (3'7"–35'5")
PT-LB55NTEA/LB55EA	1.2 m–12.0 m (3'11"–39'4")
Optical axis shift	
PT-LB60NTEA/LB60EA	6:1 (fixed)
PT-LB55NTEA/LB55EA	9:1 (fixed)

NOTES ON USE

- The projector uses a high-voltage mercury lamp that contains high internal pressure. This lamp may break, emitting a large sound, or fail to illuminate, due to impact or extended use. The length of time that it takes for the lamp to break or fail to illuminate varies greatly depending on individual lamp characteristics and usage conditions.
- The brightness of the lamp will gradually decrease with use.
- The lamp, LCD panel, polarizing plate, and polarizing beam splitter (PBS) are consumable parts. These parts may need to be replaced during the guarantee period if the projector is used for six or more hours per day.
- The replacement cycle of the LCD panel, polarizing plate, and polarizing beam splitter (PBS) will be shortened if the projector is subjected to continuous use for six or more hours. Likewise, the replacement cycle of the lamp will be shortened if the power is frequently turned on and off or the projector is subjected to continuous use for 10 or more hours.
- Interruptions may occur in the wireless connection due to signal interference or PC conditions.

Keystone correction range	Vertical: ±30°
On-screen menu	17 languages: English, French, German, Spanish, Italian, Korean, Russian, Chinese, Japanese, Swedish, Norwegian, Danish, Portuguese, Polish, Hungarian, Czech, and Thai
Installation	Front/rear, ceiling/desk (menu selection)
Built-in speakers	4 x 3 cm x 1 (oval), 1.0 W (monaural) output power
Terminals	
PC 1 IN	D-sub HD 15-pin x 1
RGB signal	R, G, B: 0.7 Vp-p, 75 ohms, Sync on green: 1.0 Vp-p, 75 ohms
	HD/SYNC, VD: TTL (positive/negative polarity compatible)
YPbPr signal	Y: 1.0 Vp-p (including sync signal), 75 ohms; Pb, Pr: 0.7 Vp-p, 75 ohms
PC 2 IN/PC 1 OUT	D-sub HD 15-pin x 1 (input/output selectable using on-screen menu)
RGB signal	R, G, B: 0.7 Vp-p, 75 ohms, Sync on green: 1.0 Vp-p, 75 ohms
	HD/SYNC, VD: TTL (positive/negative polarity compatible)
YPbPr signal	Y: 1.0 Vp-p (including sync signal), 75 ohms; Pb, Pr: 0.7 Vp-p, 75 ohms
VIDEO IN	RCA pin x 1, 1.0 Vp-p, 75 ohms
S-VIDEO IN	Mini DIN 4-pin x 1, Y: 1.0 Vp-p, C: 0.286 Vp-p, 75 ohms
AUDIO IN	RCA (L, R) x 1, 0.5 Vrms (for VIDEO/S-VIDEO)
PC 1 AUDIO IN	M3 (L, R) x 1, 0.5 Vrms
PC 2 AUDIO IN	M3 (L, R) x 1, 0.5 Vrms
AUDIO OUT	M3 (L, R) x 1, 0–2.0 Vrms (variable)
SERIAL	Mini DIN 8-pin x 1 (RS-232C)
Power cord length	2 m (6'7")
Cabinet material	Moulded material (ABS/PC)
Dimensions (W x H x D)	327 x 75 x 233 mm (12-27/32" x 2-15/16" x 9-5/32")
Weight	
PT-LB60NTEA/LB55NTEA	2.6 kg (5.7 lbs.)
PT-LB60EA/LB55EA	2.5 kg (5.5 lbs.)
Operating environment	
Temperature	0°–40°C (32°–104°F)
Humidity	20%–80% (no condensation)

Remote Control Unit	
Power supply	3 V DC (button battery x 1)
Operation range*	Approx. 7 m (23 feet) when operated from directly in front of the signal receptor
Dimensions (W x H x D)	52 x 123 x 21 mm (2-1/16" x 4-27/32" x 13/16")
Weight	74 g (2.6 ozs.) (including batteries)
Wireless LAN (PT-LB60NTEA/LB55NTEA)	
Standard	IEEE802.11b/g
Modulation	IEEE802.11b: Direct sequence spread spectrum (DSSS) system IEEE802.11g: Orthogonal frequency division multiplex (OFDM) system
Transmission system	
IEEE802.11b	CCK (11/5.5 Mbps), DQPSK (2 Mbps), DBPSK (1 Mbps)
IEEE802.11g	64-QAM (54/48 Mbps), 16-QAM (36/24 Mbps), QPSK (18/12 Mbps), BPSK (9/6 Mbps)
Transmission speed	
IEEE 802.11b	11 Mbps, 5.5 Mbps, 2 Mbps, 1 Mbps
IEEE 802.11g	54 Mbps, 48 Mbps, 36 Mbps, 24 Mbps, 18 Mbps, 12 Mbps, 9 Mbps, 6 Mbps
Operation range**	Approx. 30 m (98'5")
Frequency range	2,412 MHz–2,472 MHz
Channels	1–13 ch
Supplied Accessories	
	• Power cord • Wireless remote control • Batteries for remote control • VGA cable • Lens cover • Carrying bag • Wireless Manager ME 3.0 (CD-ROM)*
Optional Accessories	
ET-LAB30	Replacement lamp unit
ET-PKB30	Ceiling mount bracket
ET-RM300	Full-function wireless remote control
ET-ADSR	Serial adapter (DIN 8-pin/D-sub 9-pin)

*1: In AI mode.

*2: Operation range differs depending on the environment.

*3: For the PT-LB60NTEA and PT-LB55NTEA only.

To use wireless functions, a PC is required that meets the conditions given below:

OS: Microsoft® Windows® 2000 Professional, Windows® XP Professional, Windows® XP Home Edition

CPU: Pentium® III or higher, or other compatible processor (1 GHz or higher is recommended).

Memory: 256 MB or more

Free hard disk space: 60 MB or more

CD-ROM drive: CD-ROM drive or DVD drive

Wireless LAN: IEEE 802.11b/g compatible (built-in wireless LAN system or external IEEE 802.11b/g LAN card must be installed and running normally.) However, some IEEE 802.11b/g wireless LAN may not allow connection to the projector. Internet Explorer 6.0 or later, Netscape Communicator 7.0 or later

Web browser: DirectX® 8.1b or later must be installed.

Operation is not guaranteed for all computers that meet the above conditions

Panasonic

www.panasonic.com.au

Weights and dimensions shown are approximate. Specifications are subject to change without notice.

ProSelecta

[View :: Compare :: Select - www.ProSelecta.com](http://www.ProSelecta.com)
