




Digitally yours

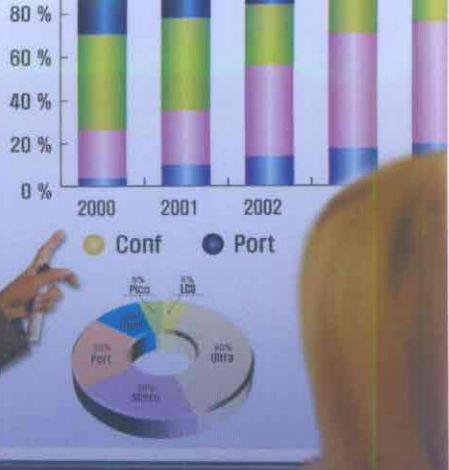

# DLP PROJECTOR RD-JT40/41

The new DLP Projector. RD-JT40/41, provides an excellent brightness of 2000 ANSI lumens with true XGA . With an outstanding image quality and brightness, RD-JT40/41 will take you to perfect presentation.



**2000 ANSI Lumen**  
& **Real XGA**

**It is easy with us wherever, whenever you go**

**Size is equal to A4 paper, 7.5lbs(3.1kg) in weight** you can take it anywhere and make a good use of it.

**Brightness 2000 ANSI lumens** It presents a very distinct image in lighted indoors.

# DLP PROJECTOR RD-JT40/41



## Specification

Model		RD-JT40	RD-JT41
SPECIFICATION	NATIVE RESOLUTION	XGA	SVGA
	MAX RESOLUTION	SXGA	SXGA
	BRIGHTNESS(ANSI Lumen)	2000	2000
	CONTRAST RATIO	600:1	600:1
	UNIFORMITY	85%	85%
	SIZE(WxHxD, mm)	308 x 95 x 240	308 x 95 x 240
	WEIGHT	3.1Kg	3.1Kg
	NOISE	<34dB	<34dB
	VIDEO COMPATIBILITY	NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM, SVIDEO	NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM, SVIDEO
	HD READY	1080i & 720p	1080i & 720p
	THROW DISTANCE(m)	0.8 ~ 10	0.8 ~ 10
	IMAGE SIZE	22" ~ 300"	22" ~ 300"
	POWER SUPPLY	AC100 ~ 240V, 50Hz/60Hz	AC100 ~ 240V, 50Hz/60Hz
	POWER CONSUMPTION	330W	330W
LCD/DMD PANEL	SIZE	0.7 DMD™ x 1, XGA	0.7 DMD™ x 1, SVGA
	DISPLAY TYPE	Digital Light Processing	Digital Light Processing
LAMP	TYPE	210W NSH	210W NSH
	LIFE TIME	2000Hr.	2000Hr.
LENS	ZOOM STYLE	MANUAL	MANUAL
	FOCAL LENGTH(mm)	23 ~ 27.6	23 ~ 27.6
CONTROL	RS-232C	○	○
AUDIO	STEREO	X	X
	OUTPUT	3W	3W
INPUT TERMINAL	PC	PC Input(d-sub)	1
		PC sound in	1
		USB	1
	AV	S-video	1
		AV Input	1
		5BNC(COMPONENT)	1 (Y/Pb/Pr, Y/Cb/Cr)
OUTPUT TERMINAL	PC	PC OUTPUT(d-sub)	1
		MOUSE PORT	1
KEYSTONE	DIGITAL VERTICAL	±7°	±7°
ACCESSORY	MAC DESKTOP ADAPTOR	optional	optional
REMARK		ceiling mount:optional	ceiling mount:optional

## Performance

- HD Compatible 1080i, 720p
- Window Zoom
- Low Noise of 34dB
- Digital Keystone Correction
- Picture In Picture (PIP)

## Features

- 2,000 ANSI Lumens
- Real XGA / Compressed XGA (SVGA)
- 3.1kg & 308 x 90 x 240mm
- Contrast of 600:1
- 1 x 0.7" DMD Panel
- 210W NSH Lamp

## Supplied Accessories

Remote control, Batteries, Power cord, PC cable, A/V cable, S input Cable, PC Audio cable, PS/2 mouse cable, Mac mouse cable, Mac Desktop adaptor, Soft Bag

## Connector Panel

The RD-JT40/41 enables direct input connection of plural sources via one PC, one S-video and video outputs for NTSC, NTSC4.43, PAL, PAL-M, PAL-N or SECAM and performs automatic frequency adjustment in response to the signal received.

