


Advanced technology results in superior reliability and quality with a low profile design.



360° Rotation: Display rotation of 360° for creative applications and greater installation flexibility.




Motorized Zoom, Focus and Lens Shift Control: Allows for greater range of installation possibilities. With the motorized function you can make fine adjustments through the remote control or RS232/IP device.




2 HDMI Digital Inputs: Dual digital inputs reduce the need for additional switcher hardware.




Convenient Networking: Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include centralized reporting, scheduling, e-mail alerts, and My Image (Image Transfer).

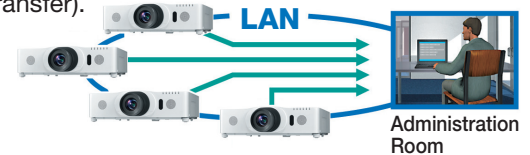

Perfect Fit 2: Enables quick adjustment of the projected image by moving its four corners one at a time. In addition, barrel or pincushion distortion, which occur on rounded surfaces, can easily be corrected.

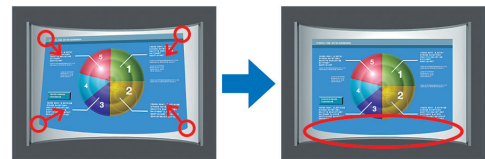

DICOM® Simulation Mode: These projectors have a DICOM (Digital Imaging and Communications in Medicine) Mode, which reproduces images with an advanced grayscale level. This mode is ideal for viewing grayscale medical images such as X-rays, and for training and educational purposes.

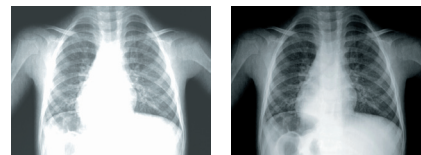

Standard Mode

DICOM Mode

- These projectors are not approved medical devices. They should not be used for actual medical diagnosis.
- Comparison photos are simulations.

Advantage Highlights

White Light Output: 5,500 ANSI Lumens

Color Light Output: 5,500 ANSI Lumens

20,000 Hour Hybrid Filter

3,000 Hour Lamp Life (Eco Mode)*

3000:1 Contrast Ratio

Wireless Presentation Ready
(Via Optional Wireless Adapter USBWL11N)

Center Lens Design

16 Watt Stereo Audio Output

Less Than 0.35W in Power Saving Standby Mode

Input Source Naming

Status Monitor

Picture By Picture

One Standard Lens and Four Optional Lenses

1.800.HITACHI
hitachi-america.us/projectors



Find Hitachi Projectors on Facebook



Follow us on Twitter @HALprojectors



Hitachi Projectors are on YouTube



5,500 ANSI Lumens White/Color Output



5,500 lumens of white light output in conjunction with equal color light output project bright, clear, true to life images in any large venue application.

Hybrid Filter (20,000 hours between maintenance)**



Hitachi's hybrid filter consists of a two-stage, layered design and an electrostatic filter, providing dust protection for up to 20,000 hours.

3,000 Hour Lamp Life (Eco Mode)*



Another key to low total cost of ownership is a long life lamp. The lamp is rated at 2,500 hours in standard mode and 3,000 hours in Eco mode.

3000:1 Contrast Ratio




Contrast can be automatically controlled through an active iris to add depth perspective during both bright and dark scenes.

Wireless Presentation Ready



You can use a wireless network by connecting the projector to a computer using the optional USB wireless adapter part number USBWL11N. The adapter supports IEEE802.11b/g and the latest 11n.

Center Lens Design



This feature makes it easy to align the projector with the center of the screen for faster and trouble-free setup.

16 Watt Stereo Audio Output



16W (8W+8W) stereo output eliminates the need to connect external speakers.

Power Saving Standby Mode



Power saving mode reduces the standby power consumption to less than 0.35W.

Input Source Naming



Users can name input sources in simple language instead of factory default name.

Exclusive to Hitachi.



Status Monitor



With Hitachi's status monitor, you'll have access in real time to projector diagnostics. Status updates include configuration information, maintenance history, as well as error and alarm messaging. For even greater user convenience, the status monitor can be accessed on the rear input panel or through the Hitachi network tools software.

Picture By Picture



Hitachi's picture by picture enables the content from any two input sources to be displayed simultaneously, side by side on one screen. With such flexibility, the input source can originate from different locations such as PC x 2 or video x 2, or PC x 1 and video x 1, with both images sharing equal screen size. This feature is also ideal for teleconferencing applications.

Multiple Lens Options



In addition to the one ML703 middle throw standard lens, four optional lenses are available: FL701 fixed; SL702 short throw; LL704 long throw; and UL705 ultra-long throw.

Network Control, Maintenance and Security



Projector management application (PJMan) allows users to monitor and control multiple projectors over LAN. Features include scheduling of events, e-mail alerts for reactive and routine maintenance. Crestron RoomView Express and AMX Device Discovery is embedded into the projector which provides out of the box compatibility with Crestron and AMX Systems.

PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send campus wide announcements.



* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

** Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

H10029-02/12-WEB
All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
©2012 Hitachi America, Ltd. All Rights Reserved.


Projection Throw Chart

Screen Size 16:10 Throw Distance

Screen Size*		Throw Distance*	
Diagonal*	Width*	Min*	Max*
30	25	39	78
60	51	78	154
80	68	104	206
100	85	129	257
150	127	194	385
200	170	259	513
250	212	323	641
300	254	388	769

Throw Ratio: 1.5 - 3.0 : 1 (distance : width)
*Measured in inches with standard lens ML703

Input/Output Terminals

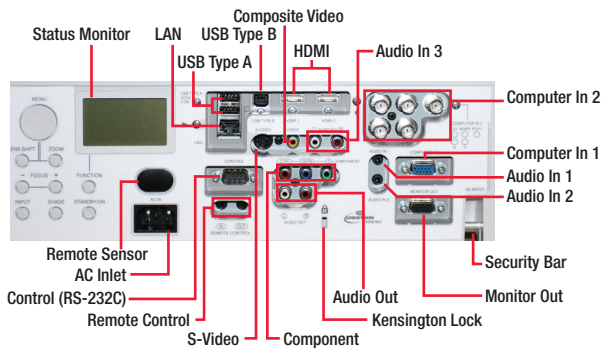

Projector Lens Chart

Lens	Inches**	Meters**
ML703 (Standard lens)	129 - 257	3.3 - 6.5
FL701	70	1.8
SL702	102 - 154	2.6 - 3.9
LL704	244 - 251	6.2 - 10.5
UL705	415 - 705	10.5 - 17.9

** Projection distances for standard lens and optional lenses when projecting onto a 100" diagonal screen.



3LCD Technology



Closed Captioning



Hitachi Trade-Up Program



AMX Device Discovery



Crestron Integrated Partner



3 Year Warranty

HDMI HDMI

*** Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

H10029-02/12-WEB

All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
©2012 Hitachi America, Ltd. All Rights Reserved.

1.800.HITACHI

900 Hitachi Way, Chula Vista, CA 91914

hitachi-america.us/projectors

Specifications	
Projection Technology	3LCD, 3 chip technology
Number of Pixels	1,024,000 pixels
Resolution	
Video	540 TV lines
Computer	1280 dots x 800 lines
Colors	16.7 million colors
Aspect Ratio	Native 16:10 and 4:3/16:9 compatible
Lens	F = 2.0 mm with motorized zoom, focus and lens shift
Throw Ratio (distance : width)	1.5 - 3.0:1
Lamp	330W
White Light Output	5,500 ANSI lumens
Color Light Output	5,500 ANSI lumens
Expected Lamp Life	Approximately 2,500 hours (standard mode), 3,000 hours (Eco mode)***
Contrast Ratio	3000 : 1 (using active IRIS)
Speaker Output	16W (8W+8W) stereo
Power Supply	AC90 - 132V / AC198 - 264V (50/60 Hz)
Power Consumption	AC100 - 120V, 50/60 Hz, 480W; AC220 - 240V, 50/60 HZ, 455W
Operating Temperature	32°F - 113°F (0°C - 35°C)
Input Signals	
Computer	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, WSXGA+, UXGA, MAC16"
Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, computer signal — TMD5 clock 27 MHz to 150 MHz
Acoustic Noise Level	37 dB (31 dB in Eco mode)
H-Sync	31.5 kHz - 106 kHz
V-Sync	56 Hz - 120 Hz
Horizontal and Vertical Keystone	+/- 35° with standard lens
Approvals	UL60950-1, C-UL, FCC part 15 subpart B Class A
Computer Input	
Analog Computer 1	15 pin D-sub x 1
Analog Computer 2	BNC x 5
Computer Monitor Output	15 pin D-sub x 1
Digital Input	HDMI x 2
Video Input	
S-Video	Mini DIN 4-pin connector x 1
Composite Video	RCA jack x 1
Component Video	RCA jack x 3, 15 pin D-sub x 1 (shared with computer In 1) BNC x 3 (shared with computer In 2)
USB Input	USB type A x 2 (for optional wireless network or TB-1 pen tablet) USB type B x 1 (for USB display or mouse control)
Audio	
Input	3.5 mm stereo mini jack x 2, RCA jack (L,R) x 1
Output	RCA (L/R) x 1
Network (LAN)	RJ-45 x1 (wired LAN)
Control Terminals	9 pin D-sub x1 for RS-232C (serial)
Dimensions (W x D x H)	19.6" x 15.6" x 5.3"
Weight	19.18 lbs.
Closed Captioning	CC1, CC2, CC3, CC4, T1, T2, T3, T4
Supplied Accessories	Remote control with two AA batteries, power cord, computer cable, one standard ML703 lens, lens cap, user's manuals, security label, application software (CD x 1), wireless USB cover
Optional Accessories	TB-1 wireless USB tablet, H02851 laser remote, USBWL11N USB wireless adapter
Optional Lenses	4 optional lenses are available: FL701, LL704, SL702, UL705
Replacement Parts	
Lamp	CPWX8255LAMP (DT01291)
Remote Control	HLQ2801
Filter	MU06642

