

## High Performance That Blasts 2600 Lumens of Ultra Brightness

NEW



### Latest DLP® and BrilliantColor™ Technology with 2600 Lumens of Super Brightness

The D326MX and D326WX projectors use the latest DLP® technology from Texas Instruments that enables you to display outstanding images and features BrilliantColor™ for exceptional brightness and vibrant colors. It offers the rich combination of features that come with an efficient lamp life of up to 3,000 hours, 2500:1 contrast ratio that shows extraordinary crisp image details, and 2600 lumens of ultra brightness that provides excellent projection under any lighting conditions.

#### Filter-Free Design

No filter require, resistant to dust and dirt, no clogged filters. Reduced maintenance fees, low total cost of ownership.

#### Anti-Theft Security Lock

A Kensington® security lock is built into the projector to prevent theft or any unauthorized removal of the projector

#### Super Low Fan Noise

Super low noise operation -30 dBA (low mode)

#### Rapid Start-Up

Quick start, no need to wait for the projector to warm up.

#### Instant Shut-Down

Instant power down, no waiting period, convenient to move to next business meeting.

#### Digital Keystone (Vertical)

Allows you to adjust image setting in the most challenging presentation environments.

# D326MX/WX

# Mobile XGA/WXGA DLP® Projector



## SPECIFICATIONS

MODEL	D326MX	D326WX
DISPLAY TECHNOLOGY	0.55" 1-Chip DMD	0.65" 1-Chip DMD
RESOLUTION	XGA 1024 x 768 (Total 768,432 pixels)	WXGA 1280 x 800 (Total 1,024,000 pixels)
BRIGHTNESS	2600 ANSI Lumens	
CONTRAST RATIO	2500:1 (on/off)	
ZOOM & FOCUS	Manual Zoom & Manual Focus	
LENS THROW RATIO	1.9 - 2.2	1.5 - 1.8
PROJECTION SCREEN SIZE	36" - 246"	39" - 295"
COLOR WHEEL	5 Segments (R, G, B, W, Y)	
LAMP LIFE	200W (Shut Off Time: 4,000 hrs) with Eco-Mode	
ASPECT RATIO	Native (4:3) Compatibility (16:9)	Native (16:9) Compatibility (4:3)
PC COMPATIBILITY	VGA, SVGA, XGA, SXGA, Macintosh	
VIDEO COMPATIBILITY	720p, 1080i (thru RGB), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM	720p, 1080i (thru HDMI), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
PC INPUT TERMINALS	RGB: HD-15, Composite Video (RCA x 1), S-Video (Mini DIN) x 1, Mini-Jack x 1, HDMI (326WX only)	
OUTPUT TERMINALS	N/A	
KEystone CORRECTION	Vertical (+/- 15 degree)	
COMMUNICATION TERMINALS	USB (Service), RS-232C x 1	
FAN NOISE LEVEL	30dB (Eco-Mode), 32 dB (Standard Mode)	
AUDIO SPEAKER	1W Mono	
DIMENSIONS (W x H x D)	8.66 x 7.0 x 2.8 inches	
WEIGHT	3.2 lbs	
POWER SUPPLY	AC 100-240V, 50/60Hz	
POWER CONSUMPTION	STD (250W), ECO (210W)	
REPLACEMENT LAMP	1000054-A	
WARRANTY	3-Year Parts and Labor, 1-Year lamp warranty, and *5-Year DLP® Chip	
ACCESSORIES	AC Power cord, VGA cable, Remote Control	

## Screen Size and Projection Distance


### D326MX

### D326WX


Projection Distance L	Max. Screen (Wide) 1.9			Max. Screen Size (Tele) 2.2			Projection Distance L	Max. Screen (Wide) 1.53			Max. Screen Size (Tele) 1.76		
	Diagonal A	Width C	Height B	Diagonal A	Width C	Height B		Diagonal A	Width B	Height D	Diagonal A	Width B	Height D
4.20'	33.15"	26.52"	19.89"	28.63"	22.91"	17.18"	3.28'	29.51"	25.73"	14.47"	25.66"	22.37"	12.58"
6.56'	51.80"	41.44"	31.08"	44.74"	35.79"	26.84"	4.92'	44.27"	38.60"	21.71"	38.49"	33.55"	18.87"
7.87'	62.16"	49.73"	37.30"	53.69"	42.95"	32.21"	7.87'	70.84"	61.76"	34.74"	61.58"	53.69"	30.20"
9.18'	72.52"	58.02"	43.51"	62.63"	50.11"	37.58"	9.18'	82.64"	72.05"	40.53"	71.84"	62.63"	35.23"
10.50'	82.88"	66.31"	49.73"	71.58"	57.27"	42.95"	10.50'	94.45"	82.34"	46.32"	82.10"	71.58"	40.26"
11.81'	93.24"	74.60"	55.95"	80.53"	64.42"	48.32"	11.81'	106.25"	92.64"	52.11"	92.37"	80.53"	45.30"
13.12'	103.61"	82.88"	62.16"	89.48"	71.58"	53.69"	13.12'	118.06"	102.93"	57.90"	102.63"	89.48"	50.33"
14.43'	113.97"	91.17"	68.38"	98.43"	78.74"	59.06"	14.43'	129.86"	113.22"	63.69"	112.89"	98.43"	55.36"
15.74'	124.33"	99.46"	74.60"	107.37"	85.90"	64.42"	15.74'	141.67"	123.51"	69.48"	123.16"	107.37"	60.40"
17.06'	134.69"	107.75"	80.81"	116.32"	93.06"	69.79"	17.06'	153.48"	133.81"	75.27"	133.42"	116.32"	65.43"
18.37'	145.05"	116.04"	87.03"	125.27"	100.21"	75.16"	18.37'	165.28"	144.10"	81.06"	143.68"	125.27"	70.46"
22.96'	181.31"	145.05"	108.79"	156.59"	125.27"	93.95"	22.96'	206.60"	180.12"	101.32"	179.60"	156.59"	88.08"
32.80'	259.01"	207.21"	155.41"	223.69"	178.95"	134.22"	32.80'	295.15"	257.32"	144.74"	256.58"	223.69"	125.83"

The above numbers are approximate, and may be slightly different from the actual measurements.

D326MX/WX



## Input and Output Terminals

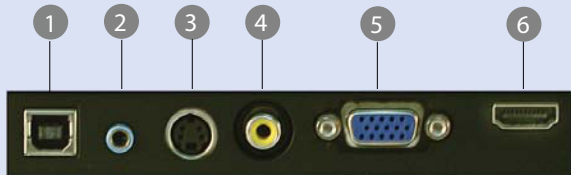

- 1 USB (Service)
- 2 Audio Input
- 3 S-Video
- 4 Video Input
- 5 VGA
- 6 HDMI (326WX only)

© 2008 Vivitek Corporation. Standard features, options and specifications subject to change without notice. Vivitek is a trademark of Vivitek Corporation. DLP logo and DLP medallion are trademarks of Texas Instruments. All other trademarks are the property of their respective holders.

## VIVITEK CORPORATION

Tel: 626-369-8420

Email: info@vivitekcorp.com

www.vivitekcorp.com

\*5 Year DLP® chip warranty is supported with the same process and terms/conditions as the 3-year warranty

