

LED

Multimedia Projector



CP-X940W & CP-S840W

1000 & 900 ANSI Lumens

- ◆ Native XGA & SVGA resolution
- ◆ 150W UHP Lamp
- ◆ 9.8 lbs.
- ◆ 2 RGB inputs / RGB output
- ◆ 1:1.3 Zoom Lens
- ◆ Digital zoom
- ◆ Picture freeze
- ◆ Remote control w/ mouse function and laser pointer

HITACHI

CP-S840W & CP-X940W LCD Multimedia Projectors

Model	CP-S840W	CP-X940W
Performance Specifications		
Liquid crystal panel structure	0.9" polysilicon active-matrix TFT X 3	0.9" polysilicon active-matrix TFT X 3
Number of pixels	480,000 pixels (V600 x H800)	786,432 pixels (V768xH1,024)
Resolution	800 x 600 color pixels	1,024 x 768 color pixels
Lens	Manual zoom (F=1.7-2.0) 1:1.3 power focus	
Lamp	150W UHP	
Brightness	900 ANSI Lumens	1,000 ANSI Lumens
Contrast ratio	200:1	
Speakers	1W + 1W (stereo)	
Power supply	AC100-120V / AC220-240V	
Power consumption	250W	200W
Operating temperature	0 - 35° C (32 - 95° F)	
Input signals	VGA, S-VGA, XGA, MAC13", MAC16" NTSC, NTSC 4.43, NTSC 3.58	VGA, S-VGA, XGA, S-XGA, MAC13", MAC16" NTSC, NTSC 4.43, NTSC 3.58
	PAL, M-PAL, N-PAL, SECAM, S-VIDEO	PAL, M-PAL, N-PAL, SECAM, S-Video

Input / Output Terminals

Video signal input terminals	S-VIDEO	Min DIN 4-pin terminal x 1
	VIDEO	RCA jack terminal x 1
	AUDIO	RCA jack terminal x 1 (L/R)
RGB input signal terminals	RGB	signal; D-sub 15-pin shrink terminal x 2
	AUDIO	Stereo mini jack x 2
RGB output signal terminals	RGB	signal; D-sub 15-pin shrink terminal x 1
	AUDIO	Stereo mini jack x 1
Control terminals		D-sub 15-pin shrink terminals x 1


Dimensions

(W x H x D)	9.8" x 3.9" x 13"
Weight	9.8 lbs.

Supplied Accessories

Remote control with laser pointer, Batteries, Power cord (U.S., UK, Euro), Video/audio cable, MAC adaptor, RS-232C cable, RGB cable, PS/2 mouse cable, ADB mouse cable, multiple language operator's manual

Screen Size (inch)	CP-S840W a (inch)	
	Minimum	Maximum
40	64	84
60	97	127
80	130	169
100	163	213
120	196	256
150	244	319
200	326	424

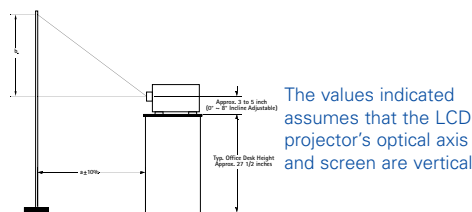

a: LCD projector to screen distance
b: Distance from lens center to screen top/bottom

Screen Size (inch)	CP-X940W a (inch)	
	Minimum	Maximum
40	67	87
60	98	130
80	130	173
100	165	217
120	197	260
150	248	327
200	331	-

The CP-S840W & CP-X940W allows the user to display images from diverse information sources accurately and with excellent resolution. For example, reproduction of video and VGA images is extraordinarily crisp and clear. This versatile projector compensates for data loss automatically in order to ensure a more natural image reproduction.

HITACHI

Hitachi America, Ltd.

2000 Sierra Point Parkway, MS:760
Brisbane, CA 94005-1835
Tel. (800) 225-1741
Fax. (650) 244-7776

Web Site: <http://www.hitachi.com/lcd>
For information on other Hitachi products: 1-800-HITACHI (800-448-2244)

Specifications and product offerings are subject to change without notice ©2000
Hitachi America, Ltd. All rights reserved. Printed in US DS.CP-S840W / CP-X940W.03.00