

The lightest way to present.



- Mobil for business-presentations
- Compact and light: 1.3 kg
- BrilliantColor™
- USB-interface




DLP® and the DLP logo are registered trademarks of Texas Instruments and Brilliant Color™ is a trademark of Texas Instruments.



Display	0.55" DLP™ Chip
Resolution	XGA 1,024 x 768
Brightness	2,000 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9
Lamp	180 W (TLPLP20LAMP)
Maximal lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 2.5 - 2.74 / f = 22 - 25.5, manual zoom
Zoom	1.17 x
Frequency (hor. / vertical)	15 - 100 kHz/43 - 120 Hz
Projection	front and rear
Digital keystone correction	Vertical +/- 16°
Picture size (diagonal)	0.9 - 7.6 m
Projection distance	1.6 - 12.0 m
Input signals	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, SXGA & UXGA (compr.)
Inputs	1 x RGB (D-sub 15), 1 x USB type A (memory/JPEG/MPEG), mini-Din S-video, composite video (RCA), audio (stereo mini jack), video/S-video audio (2 x RCA L/R), USB Reader

Outputs	-
Serial interface	-
Power supply	AC 90 - 240 V, 50/60 Hz
Loudspeaker	1 x 2 W
Dimensions (W x H x D)	210 x 65 x 165 mm
Weight	1.3 kg
Operation noise	normal 35/ECO mode 32 dB
Specials	USB, keystone correction, DDC compatible
Accessories	remote control with laserpointer and batteries, owners manual (CD ROM), RGB- and power-cable, softcase
Options	spare lamp, camera c001
Menu guidance	22 languages (GB, F, D, I, E, P, RUS, S, TR, PL, DK, CZ, H, NL, FIN, N, GR, ROM, KP/KR, JP, ID, CN)

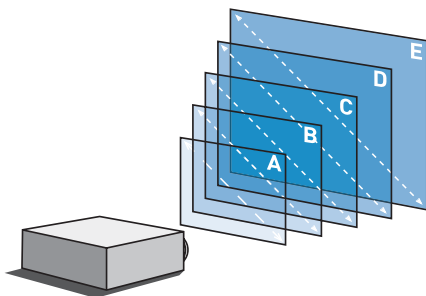

Picture size	Projection distance
A 1.02 m	1.60 - 1.90 m
B 2.03 m	3.10 - 3.70 m
C 2.54 m	3.90 - 4.60 m
D 5.08 m	7.70 - 9.10 m
E 7.62 m	11.60 - 13.70 m

