

CP-X275W

With footprint little bigger than this page and weighing less than 2.5kg, the microportable CP-X275W is packed with big model features. The component video input ensures the best possible image quality from DVD-Rom while true XGA resolution means sharp computer images.

An output of 1200 ANSI lumens ensures bright images even in relatively large venues while the short throw lens and whisper mode provide valuable versatility in more restricted locations. The CP-X275W includes a zoom lens, digital keystone correction and offers full video and computer compatibility.

- XGA resolution at 1200 ANSI lumens
- Short Throw Lens
- Digital Keystone Correction
- 32dB Whisper Mode
- High Quality Optical Zoom Lens
- Digital Magnification
- Image Freeze
- Component Video



HITACHI
Inspire the Next

CP-X275W

Technical Specifications

HITACHI
Inspire the Next

OPTICAL

Optical Structure	3 LCD Panels, one projection lens, RGB shutter method
LCD Panel	0.7", P-Si TFT panel x 3 panels with micro lens 1024 dots x 768 lines x 3 panels
Lens	F2.0-2.3 (F=17.7-21.2mm), Manual Zoom 1.2x, Manual focus
Lamp	150W UHB
Lamp Life	4000 hours lamp life in whisper mode
Brightness	1200 ANSI lumens, normal mode 900 ANSI lumens, whisper mode
Contrast Ratio	400:1
Focus Distance	0.7m-9m
Display Size	30"-300" diagonal
Colour	8 bits/colour, 16.7M colours

COMPATIBILITY

Composite Video	NTSC, PAL (-BGDHI), SECAM, PAL-M, PAL-N, PAL60
Component Video	480i, 575i, 480p, 720p, 1080i; HDTV compatible
Computer	PC, Mac, Workstation, VGA, SVGA, XGA, SXGA (smart resizing), UXGA compatible
Plug & Play	DDC1/2B at RGB input
Frequency Range	Horizontal: 15-80kHz Vertical: 50-120Hz,

FEATURES

Keystone Correction	Fixed 6:1 upward shift, normal at 12°-10° projection angle, plus digital correction ± 15% via direct keystone button on unit
Image Control	Digital magnification, freeze frame, mirror reverse & invert image, colour adjustment, digital gamma
Speakers	1.0W
Other	Ceiling mountable, auto configuration, 9 language on-screen menu

CONNECTORS

Computer Input	1 x RGB analogue - 15-pin mini D-sub 1 x Audio - stereo mini-jack
Video Input	1 x S-Video - mini-DIN 4 pin 1 x Composite - phono 1 x Component - 3 x phono
Control	1 x Audio - phono (L & R) 1 x RS-232C - 15-pin D-sub

POWER

Power Supply	100-120 / 220-240V AC, 50/60Hz
Power Consumption	200W

PHYSICAL

Dimensions	289 x 84 x 215mm (W x H x D)
Weight	2.49kg
Noise Level	≤ 38dB / 32dB (Whisper mode)


SUPPLIED WITH

Remote Control
Soft Carrying Case
Power Cord (US, UK, Europe)
Phono Video/Audio Cable
RGB Cable
Component Video Cable
AA batteries x 2

OPTIONS

Aluminium Flight Case (FLC200), Wheeled Aluminium Flight Case (FLC300A), Fabric Wheel Case (FLC800) accommodates projector and notebook computer

All brand or product names are trademarks or registered trademarks of their respective owners.
Design and specifications are subject to change without notice.

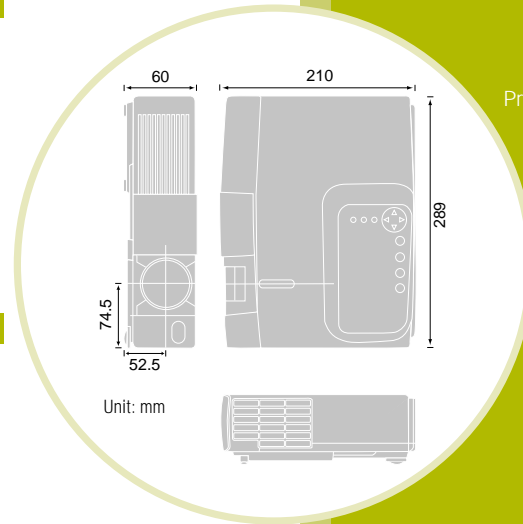

Projector Dimensions

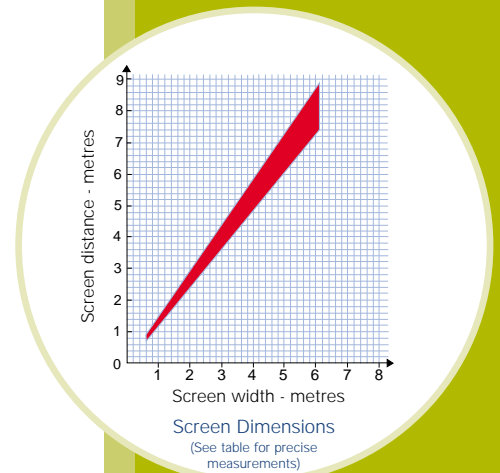


Image Size		Projection Distance	
		CP-X275W	
Diagonal	Width (m)	Min (m)	Max (m)
30" (0.76)	0.76	0.7	0.9
40" (1.02)	0.81	0.9	1.2
60" (1.52)	1.22	1.5	1.8
80" (2.03)	1.63	1.9	2.4
100" (2.54)	2.03	2.4	2.9
120" (3.05)	2.44	2.9	3.5
150" (3.81)	3.05	3.7	4.4
200" (5.08)	4.06	4.9	5.8
300" (7.62)	6.10	7.4	8.9

HITACHI DIGITAL MEDIA
Hitachi Europe Ltd
Dukes Meadow
Millboard Road
Bourne End
Buckinghamshire
SL8 5XF
Tel: 01628 643 000
www.hitachidigitalmedia.com

The specification above and photography is for reference only and may be subject to change.