

NP Installation Series

NP1150/NP2150/NP3150/NP3151W digital installation projectors

Powerful installation projectors equipped to take on the most demanding integration projects.

FLEXIBILITY ENABLES PERFORMANCE

- Silicon Optix HQV™ technology is a high-performance video processing/scaling system designed for computer signals as well as standard or high-definition video. The technology produces superior video processing using pixel-based, motion-adaptive de-interlacing to remove undesirable motion artifacts typical of interlaced signals. This processing creates life-like images in applications such as video conferencing.
- Bright enough for most applications: 3700 lumens (NP1150), 4000 lumens (NP3151W), 4200 lumens (NP2150) and 5000 lumens (NP3150)
- Vertical and horizontal lens shift enables flexible projector placement
- Windows Network Projector function within Windows Vista™ connects directly to networked projectors without the need for additional proprietary software
- Complete line of optional bayonet style lenses allow for a quick and easy lens change
- Geometric correction tool allows you to project on spheres, cylinders, corner angles and more
- Remote desktop connection allows the projector to connect to a networked computer remotely. Controlling a networked computer is as simple as connecting a USB mouse and keyboard directly to the projector's USB input.
- Flexible video/data connections, including S-video, component video, DVI with HDCP, composite video, two computer inputs (1-HD15 and 1-RGBHV) and monitor output
- Advanced color management automatically adjusts for input type (presentation, movie, video, graphic and sRGB)
- PIP/ESS allows two sources to be displayed on the screen at one time in either a picture-in-picture or side-by-side configuration.

INTEGRATED NETWORKING AND ASSET MANAGEMENT

- Integrated high-speed wireless LAN IEEE 802.11b/g
 - Presentation mode enables wireless connection between computer and projector
 - Broadcast mode allows you to send information from one computer to several projectors
 - Data conferencing mode enables you to send information to the projector and other computers
 - In training mode, the presenter's computer can be used to view the participant's computer image on the projector
- Desktop control allows you to securely transmit information wirelessly to the projector from a docking station or PC in another room
- Image Express Utility (IEU 2.0; compatible with Windows or Mac operating systems) dedicated projector software provides wired and wireless data transmission via peer-to-peer or over the network
- Integrated RJ45 connection for quick connection to the LAN (10/100 base-T capability)
- Remote diagnostics enable the user to monitor and make adjustments to the projector remotely


EXTENDING THE LIFE OF THE PROJECTOR

- ECO Mode™ technology increases lamp life by up to 50%
- Lamp saver technologies enable the cooling fan to continue running even after the power source is disconnected. Built-in sensors protect the lamp and projector from overheating.
- Cabinet control lock setting enables user to deactivate buttons on cabinet to prevent unwanted changes to projector settings
- Logo lock restricts changes to logo saved in projector memory
- Password protection restricts unauthorized use of projector
- Secure data using WEP/WPA encryption
- Email notification informs the system administrator when the lamp approaches the end of its useful life



Series Features and Benefits

- VERTICAL AND HORIZONTAL LENS SHIFT
- HQV™ PROCESSING
- WINDOWS NETWORK PROJECTOR
- REMOTE DESKTOP CONNECTION
- COMPLETE LINE OF (5) BAYONET STYLE LENSES
- POWERFUL INTEGRATED NETWORKING AND ASSET MANAGEMENT
- REMOTE DIAGNOSTICS
- COMPREHENSIVE INPUT PANEL
- 3D REFORM WITH GEOMETRY CORRECTION
- LAMP SAVER TECHNOLOGIES

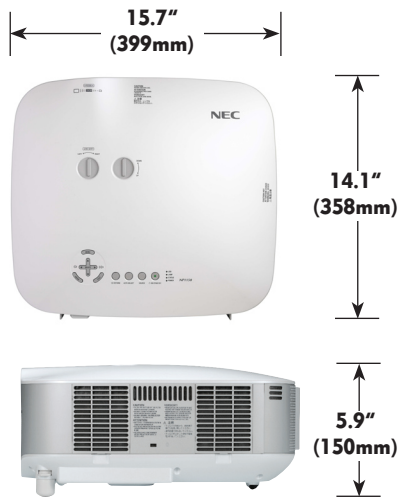

UNIQUE FEATURES

3D Reform™ allows you to square the image by adjusting horizontally, vertically or diagonally when the projector cannot be placed parallel or perpendicular to the screen

Advanced AccuBlend™ ensures detailed images when non-native resolution sources are connected to the projector

Direct power off protects the lamp by enabling the cooling fan to continue running after power is disconnected

Built-in wall color correction presets provide for adaptive color tone correction to display properly on non-white surfaces

AutoSense™ automatically syncs with any computer signal and features one-touch image optimization

Kensington lock slot enables security cable to be attached to the projector

64-step image magnification with location control

Sleep timer can be set to automatically turn off the projector

Discreet source keys for source selection

Computer-free presentations via USB drive or PCMCIA card inserted directly into the projector allows you to change images using the wireless remote control provided

High-speed wireless IEEE802.11g and improved circuitry provide communication up to three times faster than previous models

Built-in HTTP page for control and monitoring over a LAN network. E-mail notification of error messages or lamp end-of-life can be sent to remote locations.

WARRANTY

Registered owners receive a 2-year parts and labor warranty including the first year of InstaCare. The lamp is covered for one year or 500 hours, whichever comes first. InstaCare provides the original owner one year of either limited 3 business day repair/return or next business day exchange.

IN THE BOX

Remote control, remote control cable, batteries, power cord, RGB signal cable, lens cap, user's manual on CD-ROM, quick start guide, product registration card, wired and wireless network setup guide, PC Card lock, lens anti-theft screw



Specifications for NP1150/NP2150/NP3150/NP3151W

OPTICAL	
Display Technology	NP1150/NP2150/NP3150: 0.8" LCD with MLA NP3151W: 0.74" LCD with MLA
Resolution Native	NP1150/NP2150/NP3150: XGA 1024 x 768 NP3151W: WXGA 1280 x 800
Maximum Light Output (lumens)	UXGA 1600 x 1200 NP1150: 3700 normal NP2150: 4200 normal NP3150: 5000 normal NP3151W: 4000 normal
Contrast Ratio	NP1150/NP2150/NP3150: 600:1 NP3151W: 500:1
Lamp Type	330W AC
Lamp Life (up to)	2000 hours normal / 3000 hours eco
Screen Size (diagonal)	25 to 500 in, 635 to 12,700mm
Throw Ratio	1.5 to 2.0 (standard lens)
Projection Distance	2.5 to 68.5 ft, 0.74 to 20.9 m
Projection Angle	10.3 to 10.8° tele / 13.7 to 14.5° wide
Lens	
Zoom	1 to 1.33
Focus	Manual
F-number	F = 1.7 to 2.2mm, f = 24.4 to 32.5mm
Shift	Manual: 50% vertical, 10% horizontal
SIGNAL COMPATIBILITY/CONNECTIVITY	
Scan Rate	Horizontal 15 – 108 kHz / Vertical 48 – 120 Hz
Supported Video Standards	NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM
SD/HD Video Signal Compatibility	1080i, 720p, 576p, 576i, 480p, 480i
PC Signal Compatibility	VGA, SVGA, XGA, SXGA, SXGA+, UXGA
Macintosh Compatibility	Yes
Input/Output Terminals	
RGB 1 (analog)	15 pin
RGB2 (analog)	5-BNC
RGB3 (digital)	DVI-D w/ HDCP
Video 1	RCA
Video 2	S-Video
Video 3	Component
Audio	(2) L/R RCA, (3) mini stereo
Audio Out	mini VAO
Monitor Out	Yes
Audio	5W stereo
External Control	RS-232, IR
Sync Compatibility	Separate Sync / Composite Sync / Sync on G
ELECTRICAL	
Power Req.	100 – 240V AC, 50/60Hz
Input Current	NP1150/NP2150: 5.5A NP3150/NP3151W: 5.9A
Power Consumption	NP1150/NP2150: 460W NP3150/NP3151W: 490W
MECHANICAL	
Installation Orientation	Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear
Dimensions (WxDxH)	15.7 x 14.1 x 5.9 in. / 399 x 358 x 150mm
Net Weight	16.1 lbs / 7.3 kg
Fan Noise	NP1150: 33dB normal/30dB eco NP2150: 34dB normal/30dB eco NP3150/NP3151W: 38dB normal/31dB eco
Regulations	USA UL 1950 FCC Class B, Canada CSA950 (C-UL), NOM
ENVIRONMENTAL	
Operational Temp	41° – 104°F / 5° – 40°C
Humidity	20-80% non-condensing
Storage	14° – 122°F / -10° – 50°C
ACCESSORIES	
NP06LP	Replacement lamp
NP1000CM	Ceiling mount
NP1000TC	Rolling case with extension handle
NP1000ATA	ATA certified case for shipping and secure storage
SCP100	Suspended ceiling plate
NP01FL	0.8:1 fixed short throw lens
NP02ZL	1.18 – 1.54:1 zoom lens
NP03ZL	1.94 – 3.07:1 zoom lens
NP04ZL	2.98 – 4.77:1 zoom lens
NP05ZL	4.62 – 7.02:1 zoom lens
PW RCRD-PJPX	Power cable
RGBCBL-PJPX	RGB cable
RMT-PJ26	Replacement remote
Additional accessories are available, including screens, carts, mount accessories and replacement cables. Visit www.necdisplay.com for details.	

3D Reform, Advanced AccuBlend, Autosense and Eco-Mode are trademarks of NEC Display Solutions. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change. 2/08 ver. 3.

©2008 NEC Display Solutions of America, Inc.
All rights reserved.

NEC Display Solutions

500 Park Boulevard, Suite 1100
Itasca, IL 60143
866-NEC-INFO

NEC