

Acer 7755C/7753C
Digital Projector

Enlighten your
bright ideas
everywhere



Acer 

Features



Acer 7755C/7753C Digital Projector


- True XGA/SVGA resolution (1024 x 768/800 x 600) with 800/900 ANSI lumens
- 0.9" P-Si TFT active matrix LCD panel
- Ceiling mountable, rear projection capable
- Remote control with virtual mouse and laser pointer
- Freeze frame and magnify feature



Acer 7755C



Acer 7753C

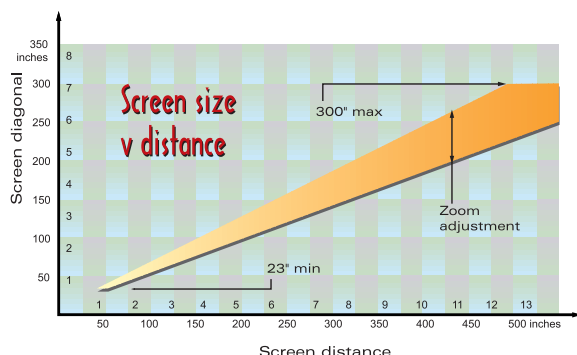

Specifications

	7755C	7753C
Optical	LCD Panel: 3*0.9"p-si TFT Active Matrix 1024 dots *768 lines *3 panels Lamp: 120W UHP Brightness: 800 ANSI Lumens Resolution: 1024 dots*768 lines Compatibility: XGA, SXGA(Compressed), VGA and SVGA, Macintosh, Power Macintosh, Power Book. Horiz. Frequency: 15.75-80.0 KHZ Projection System: 3 LCD panels Focus Distance: 1.2m-12.3m Color: Full color (16.7 million colors) Aspect Ratio: 4:3 Video: 400 TV lines	LCD Panel: 3*0.9"p-si TFT Active Matrix 800 dots *600 lines *3 panels Lamp: 150W UHP Brightness: 900 ANSI Lumens Resolution: 800 dots*600 lines Compatibility: SVGA, XGA(Compressed), VGA and SVGA, Macintosh, Power Macintosh, Power Book. Horiz. Frequency: 24.8-60.0 KHZ Projection Lens: F1.7-2.0, F=38-49 mm Screen Size: 23" to 300" diagonal Contrast Ratio: 200:1(100:1 Type ANSI) Lamp Life: 2000 hours
Compatibility	Video: Full PAL, NTSC and SECAM Computer: 7755C- XGA, S-XGA (Compressed), VGA and S-VGA, Macintosh, Power Macintosh, PowerBook 7753C- SVGA, XGA (Compressed), and VGA, Macintosh, Power Macintosh, PowerBook	
Connectors	RGB Input: 2 x Analog-D-sub 15 pin 2 x Audio-Stereo Mini-Jack Video Input: 1 x S-Video Mini-Din 4 pin 1 x Composite-Phono 2 x Audio-Phono L and R	RS-232C: 1 x D-Sub 15 pin RGB Output: 1 x Analog-D-sub 15-pin Audio Output: 1 x Audio-Stereo Mini-Jack
Additional Features	Zoom: Manual Zoom (1: 1.3) Area Magnify: Up to 4 x Selected Area Image Freeze: Store & Display, RGB and Video	Plug & Play: Horizontal & Vertical Reverse Audio: 1W Stereo, Two Internal Speakers
Laser Beam	Laser type: Class 2, Wavelength 660nm, Output <1mW	
Supply accessories:	Remote Control unit with virtual mouse and Laser Point, Power Cable, VGA Cable, 9 pin PS/2 Mouse Cable, Video/Audio Cable, S-Video Cable, Mac Adaptor and ADB Mouse Cable, Two AA Batteries, Stereo Mini-Jack cable	
General	Power Supply: AC100-120V, 220-240V 50/60HZ Auto Switching, 200W Dimensions: 249 x 107 x 335mm (W x H x D)	Weight : 4.4kg (9.8lbs)

Addresses

Worldwide Headquarters:
Acer Peripherals, Inc.
Digital Display B. D.
 157 Shan-Ying Road, Kweishan,
 Taoyuan 333, Taiwan, R.O.C.
 Tel: +886-3-359-5000
 Fax: +886-3-359-5678
<http://www.acerperipherals.com.tw>

Overseas Operations:
U. S. A.
Acer Peripherals America, Inc.
 2641 Orchard Parkway, Building 3
 San Jose, CA 95134, U. S. A.
 Tel: +1-408-432-6200
 Fax: +1-408-526-1863
<http://www.acerperipherals.com>

Europe
Acer Peripherals Holland
 Ruysdaelbaan 3H, 5642 JJ Eindhoven,
 The Netherlands
 Tel: +31-40-290-9200
 Fax: +31-40-290-9299
<http://www.acerperipherals.nl>

