

MC-WX8751W

3LCD Projector



Introducing our latest 3LCD MC-WX8751W projector which combines all our technical expertise with our market knowledge.

This new powerful 3LCD WXGA projector is brought to market with 10,000:1 contrast ratio. The MC-WX8751W offers 7,500 ANSI lm, making it a perfect model for integrating into applications such as museums, retail and large conference rooms. With seven optional lenses to choose from and set-up for blending and warping makes it easier when using the software tool that includes colour uniformity adjustment which makes it ideal for multi projector installations.

Key Features:

WXGA 1280 x 800 resolution

7500 ANSI lumens / Colour light output

10,000:1 contrast ratio

Images up to 600" diagonal

Edge Blending and Warping

20,000hrs filter life


3 years / 6 months (for education and extended warranties please contact your local dealer)

Please note: This is a preliminary data sheet. Content, technical specifications and images are subject to change.

MC-WX8751W 3LCD Projector

Technical Specifications

Panel Size	3LCD 19mm (0.75")	Security Features	PIN Security Lock, MyScreen Password Lock, Transition Detector, My Text, Password Lock, Key Lock (Key pad, Remote Control), Lens Lock
Panel Structure	3LCD	On Screen Display Languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese
Resolution	WXGA (1280 x 800)	Digital Input	HDMI x 2, HDBaseT x 1, DisplayPort x 1
Light Output (Brightness) ANSI Lumens	7500 (Normal), 6000 (Eco)	Analogue Input	15 pin Mini D-Sub x 1, RCA Jack x1
Contrast Ratio	10,000:1	Video Output	15 pin Mini D-Sub x 1
Light Source	Lamp	Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Lamp Life (Hours)	2000 (Normal), 4000 (Eco)	Audio Output	RCA Jack (L/R) x 1
Lens	Interchangeable, not included	RS-232C Control	1 x 9-pin D-Sub
Number of colours	16.7 million colours	Wireless LAN	USB-WL-11N wireless adapter (optional)
Lens Zoom	Powered Zoom x 1.7 (Standard Lens ML-713M)	Wired LAN	RJ45 connector x 1
Lens Focus	Powered Focus	USB Type-A	USB Type A x 1 (wireless adapter)
Projection Lens F No.	1.6 – 2.0 (using ML-713M)	Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Lens Shift	Motorized: Vertical 0 – +55%; Horizontal +/-10% (ML-713M)	Operating Power Consumption	560W
Focus Distance	1.2 – 22.5m (Wide), 1.9 – 38.3m (Tele) (ML-713M)	Standby Power Consumption	Less than 0.35W
Distance to Width Ratio/ Throw Ratio (:1)	1.7 – 3.0 (ML-713M)	Weight	11.1kg
Diagonal Display Size	30 – 600" (FL-710M 100" – 350")	Dimensions (W x H x D)	498 x 156 x 426mm
Speakers	8W Stereo	Noise	41dB (Normal), 33dB (Eco)
Digital Keystone Correction (Degrees)	Horizontal ±35°, Vertical: ±35° (ML-713M)	Filter Life (Hours)	20,000
Picture Modes	Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim	Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Magnify, Mirror reverse image, Up-side down image	Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+ / SXGA/ SXGA+ / WSXGA+ / UXGA/HD (Compressed), MAC16"
Operating Features	Accentualizer and HDCR, Auto Power Off, Auto signal search & Source skip, Blending/Cropping, Closed Caption (CC1–4, TEXT1–4) support NTSC (Video) and 480i (Component signal), Digital Keystone Correction (Horizontal: ±35 degrees, Vertical: ±35 degrees), Direct Power On, Eco Mode (Normal, Eco), Equalizing Colour temperature Adjustment, Equalizing Digital Gamma Correction, Filter timer / selectable interval time to show the message for air filter cleaning, (20,000hours is the default, Hybrid filter), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDBase-T, Image blank by RS232C/Remote control, LED lamps (Power, Lamp, Temp, Security, Filter, Shade), Lens memory (Lens shift position, Lens type), MAC address displayed on the side of projector, Magnify 4 times (WUXGA) by RS232C/Remote control, Mechanical shutter, Mirror Reverse Image, Up-side Down Image, My Button by Remote control, My Memory, My source, My Text, MyScreen, Overscan (Video, Component video signal), Perfect Fit (4 corners), capable of saving/loading the setup, Picture by Picture/Picture in Picture, Picture Freeze by RS-232C /Remote control.	Video	525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Extron XTP system, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie). ----- reference purpose only, PJLink™ Projector Management via SNMP	Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Hole Cover x1, Adapter Cover x1, Terminal Cover x1, HDMI Cable Holder x2, Cable Tie x2
		Optional Accessories	USB wireless adapter USB-WL-11N, Wireless pen tablet TB-1, Optional Lenses: Ultra-short-throw FL-710M, Short-throw USL-701M, Short-throw FL-701M, Short-throw SL-712M, Standard-throw ML-713M, Long-throw LL-704M, Ultra-long-throw UL-705M
		Remote Control	HL02805
		Replacement Lamp/Filter	DT01881M / UX40821
		Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)

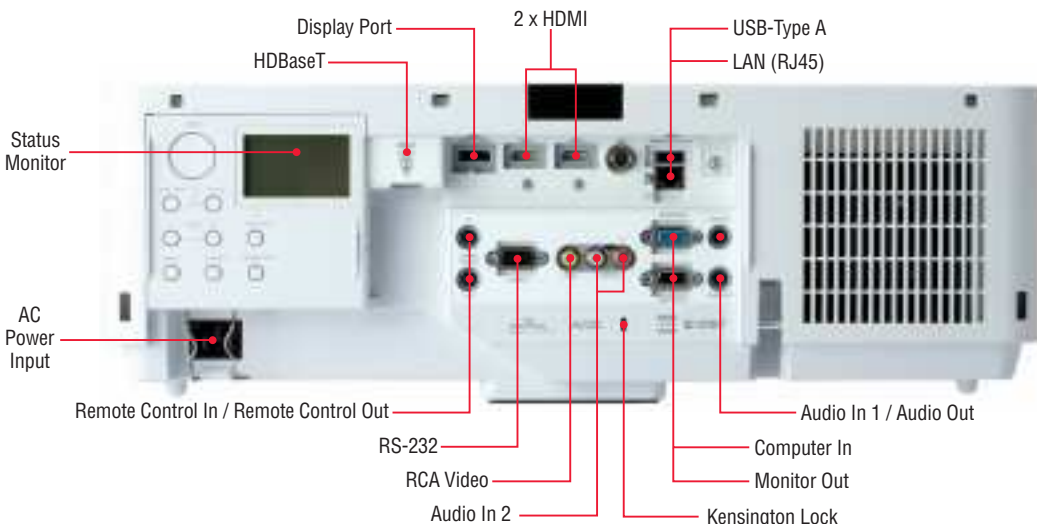

Dealer Stamp

maxell
Within, the Future

Maxell Limited

Whitebrook Park, Lower Cookham Road,
Maidenhead, Berkshire, UK, SL6 8YA
Tel: +44 (0)1628 585 000
www.maxelldisplay.com

Specification and photography subject to change.