



# PE Series

Ideal for classrooms and corporate conference rooms



# Bright, affordable and compact laser projector with broad zoom and lens shift

## Powerful Performance

- After startup images appear immediately with breakthrough laser technology
- Brightness adjustment maximize laser life and allow for a consistent looking image over an extended period of time
- High performance video processing/scaling supports 4K/30 content
- Integrated software support for Crestron Roomview, AMX Beacon, PJ Link control systems

**4K UHD**  
READY

## More Flexible Installations


- Lens shift capabilities make alignment easy
- Tilt-free installation capabilities make these projectors ideal for almost any install environment, including portrait orientation



## Advanced Installation Features


### Lens Shift

Lens shift provides greater flexibility when determining install location

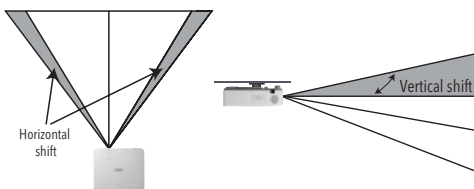


### Tilt-free

The projector can be rotated freely (360°) to orient the image depending on the installation requirements



### Portrait mode

Allows the projector to be rotated (and screen if necessary) to a vertical alignment so that portrait content can be viewed without black bars on the side when landscape mode is used.



## MultiPresenter

MultiPresenter is application software that lets you display your device's screen (PC, tablet, smart phone, etc.) on the receiver projectors via wired or wireless LAN. MultiPresenter is free and available on Windows, Mac, iOS, and Android. MultiPresenter can send images from your various devices, which enables you to display real-time images with the internal camera or web pages on the smart devices in combination with a file sharing application.

**MultiPresenter™**

## NaViSet Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control functionality for a majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.



## UNIQUE FEATURES

**Advanced AccuBlend™** ensures detailed images when non-native resolution sources are connected to the projector

**Remote diagnostics** enable the user to monitor and make adjustments to the projector remotely

**Built-in HTTP page** for control and monitoring over a LAN network. Email notification of error messages or lamp end-of-life can be sent to remote locations.

## WARRANTY

Registered owners receive a five (5) years or 20,000 hours (whichever comes first) parts and labor warranty including InstaCare next business day exchange.

## SHIPS WITH

Remote control, batteries, power cord, user's manual on CD-ROM, quick start guide, product registration card.

## ACCESSORIES

SCP200	Suspended ceiling plate
PA600CM	Ceiling mount
NP05LM1	Wireless LAN Module
RMT-PJ39	Replacement remote control
PWRCRD-PJPX	Power cable

## ORDERING MODEL NUMBERS

NP-PE506WL  
NP-PE506UL



NP-PE506WL



NP-PE506UL



NP-PE506WL  
NP-PE506UL



NP-PE506WL  
NP-PE506UL



NP-PE506WL  
NP-PE506UL

		PE506WL	PE506UL
Display Technology		0.64" LCD	
Light Output (lumens)	Center	5,500	
	ECO mode OFF	5,200	
	ECO1 mode	Approximately 60%	
	ECO2 mode	Approximately 50%	
Resolution	Native	WXGA 1280 x 800	WUXGA 1920 x 1200
	Maximum	Up to 4K@30 (HDMI), WUXGA (1920x1200) Analog	
Contrast Ratio (up to)		3,000,000:1	
Laser Life (50%)	ECO mode OFF	20,000 hours	
	ECO2 mode	30,000 hours	
Screen Size (diagonal)		30 - 300 in. / 0.76 - 7.62m	
Projection Distance		2.6 to 44.3 ft. / 0.8 to 13.5m	
Projection Angle		0 - 9.6° tele / 0 - 15.9° wide (at 60°)	0 - 10.8° tele / 0 - 17° wide (at 60°)
Lens	Zoom	Manual	
	Zoom Ratio	1.66x	1.6x
	Throw Ratio	1.2 - 2.1:1	1.22 - 1.98:1
	Focus	Manual	
	F-number, focal length	F:1.7~2.21 / f=17.42~28.99mm	F:1.5~2.08 / f=17.2~27.7mm
	Shift	Manual (H = +/- 26% / V = -0%~+55%)	Manual (H = +/- 29% / V = -0%~+60%)
Keystone Correction		+/- 30° horizontal (manual), +/- 30° vertical (manual + auto)	
Synchronization Range	Horizontal	15-100kHz (RGB: 24kHz or over)	
	Vertical	24-85Hz	
SD/HD Video Signal Compatibility		480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 4K UHD	
PC Signal Compatibility		VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA	
Macintosh Compatibility		Yes	
Input Terminals	RGB1 (analog)	VGA 15-pin D-sub	
	RGB2 (digital)	HDMI w/ HDCP (v1.4b)	
	RGB3 (digital)	HDMI w/ HDCP (v1.4b)	
	Audio In	Stereo Mini Jack	
Output Terminals	Monitor Out	VGA 15pin D-sub	
	Audio Out	Stereo Mini Jack	
Wired LAN port		RJ45 (100Base-TX/10Base-T)	
USB	Type A	Wireless LAN (optional), Memory, (2.0A)	
	Type B	Service	
External Control		RS-232 (D-Sub 9pin), IR, LAN	
Built-in Speaker		16W	
Power Requirements		100-240V AC, 50/60 Hz	
Input Current		TBD	TBD
Power Consumption	ECO mode OFF	TBD	TBD
	ECO1 mode	TBD	TBD
	ECO2 mode	TBD	TBD
	Standby (network)	2.0W or less	
Standby (normal)		0.5W or less	
Installation Orientation		Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear	
Product Dimensions (WxHxD)		15.9 x 5.4 x 14.1 in. (405 x 137 x 358 mm)	15.9 x 5.4 x 14.7 in. (405 x 137 x 373 mm)
Net Weight		17.3 lbs. (7.85 kg)	17.5 lbs. (7.95 kg)
Shipping Dimensions (WxHxD)		20.1 x 10.2 x 19.7 in. (510 x 260 x 500 mm)	
Gross Weight		21.7 lbs. (9.85 kg)	21.9 lbs. (9.95 kg)
Fan Noise		37dB (ECO mode Off), 27dB (ECO mode)	
Regulations		USA: UL (UL60950-1/UL62368-1) FCC Part15 Class B, Canada: CAN/CSA (62368-1-14) ICES-003 Issue 7	
Operating Temperature		32-104°F / 0-40°C	
Storage		14-122°F / -10-50°C	
Humidity		20 to 88% Humidity (Non-Condensing)	

Additional accessories are available, including screens, carts, mount accessories and replacement cables. Visit [www.sharpnecdisplays.us](http://www.sharpnecdisplays.us) for details.

